


Our systems for flat roofs made of concrete, bitumen membranes or for covered roofs are specially developed for sustainable protection even under extreme weather conditions. As a second roofing membrane, it is the simplest and most cost-effective solution to seal a roof when leaks start to occur. Our system prevents moisture damage to the roof structure, which would result in even higher costs. The roof coating is also suitable as a sealant for preventive roof protection.

System features

- Roof coating to extend the service life of bituminous pavements
- Heat-inhibiting
- Seamless closure
- Weatherproof
- Cold-elastic
- Resistant to flying sparks
- Non-yellowing
- Stain-resistant

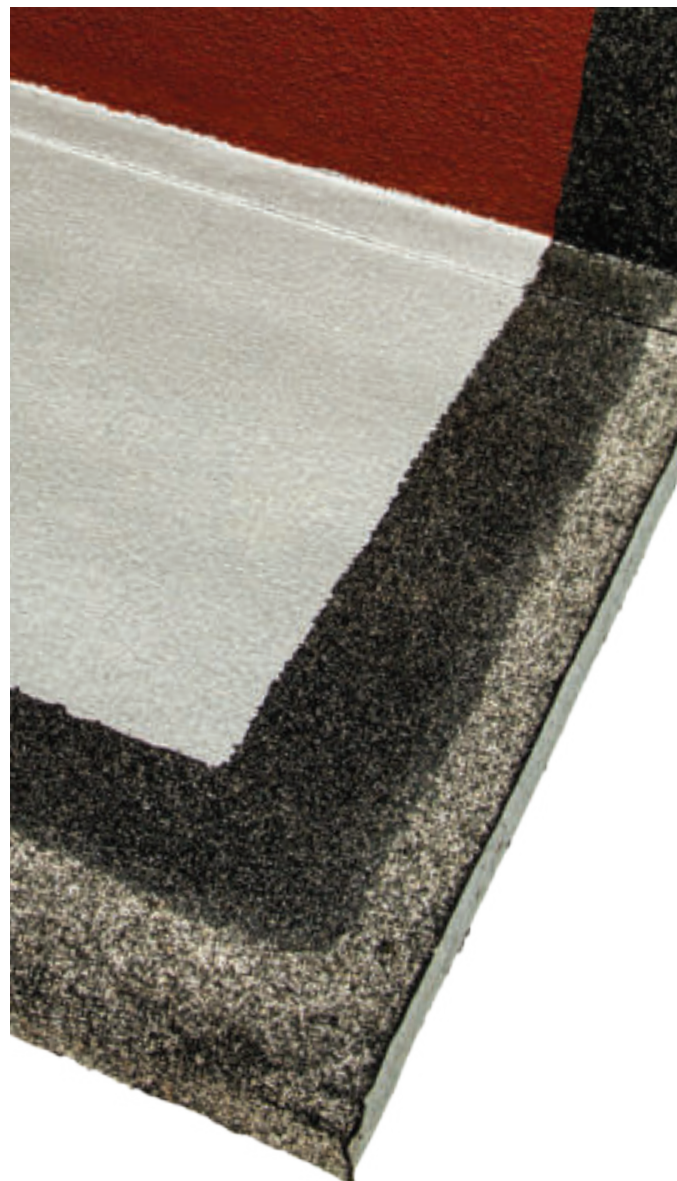

Coating

WILLPUR 2096	1-component	0,5	kg/sqm
WILLPUR 2207	1-component	0,5	kg/sqm
WILLPUR 2212	2-components	1,0-1,8	kg/sqm

Primer

0,5 kg/sqm

WILLPOX 1109 elastic – 2-components



Color options

Available in RAL colors.



Suitable for the following substrates:

- | | | |
|--|---|---|
| <input checked="" type="checkbox"/> Concrete | <input checked="" type="checkbox"/> Screed | <input type="checkbox"/> Exposed aggregate concrete |
| <input checked="" type="checkbox"/> Asphalt | <input checked="" type="checkbox"/> Bitumen | <input type="checkbox"/> Laminate/PVC |
| <input checked="" type="checkbox"/> Tiles | <input type="checkbox"/> Wood | <input type="checkbox"/> Glass |
| <input type="checkbox"/> Ferrous metals | <input type="checkbox"/> Other metals | <input type="checkbox"/> Rigips |



Total coating thickness	1-2 mm
Accessibility	1 day after the last working cycle
Working time	15 hours (for 100sqm)
No. of applications	1-2
Shore hardness	Shore A65-70
Solvent-free	yes
Permeable	no
Water-permeable	no
Emission-free	yes

Tools



Mixing bucket



Mixing tool



Sealing roller



Tooth spatula

Processing information

When processing reactive plastics, the temperature of the substrate as well as the ambient temperature are of particular importance. At low temperatures, chemical reactions are generally delayed, which leads to an extended processing, reworkability, walkability and hardening time. At the same time, the material consumption increases due to the higher viscosity. At high temperatures, the chemical reactions are accelerated, which means that the above mentioned times can be shorter. For a complete hardening of the reaction plastic, the average temperature of the substrate must be above the minimum temperature.

More detailed processing instructions can be found in the system data sheets and the technical data sheets of the individual components! These are delivered with your goods.