

System 21


Anti-Slip Coating

This coating is a liquid-tight, mechanically and thermally highly resilient system, specially designed for surfaces with a high risk of slipping, e.g. exterior surfaces at car washes, entrances and ramps, saunas and swimming pools or surfaces in animal husbandry.

System features

- stress-free at minus temperatures
- anti-slip
- easy to install even for non-specialists

- solvent-free
- easy to maintain
- physiologically harmless
- resistant to chemicals
- UV-resistant

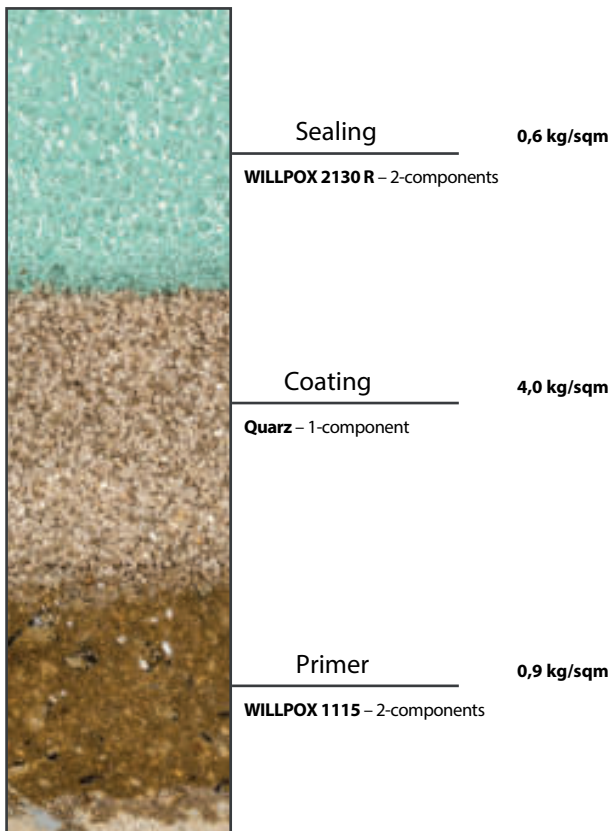

Color options

Available in all RAL colors.





Suitable for the following substrates:

<input checked="" type="checkbox"/> Concrete	<input checked="" type="checkbox"/> Estrich	<input checked="" type="checkbox"/> Exposed aggregate concrete
<input type="checkbox"/> Asphalt	<input type="checkbox"/> Bitumen	<input type="checkbox"/> Laminate/PVC
<input checked="" type="checkbox"/> Tiles	<input type="checkbox"/> Wood	<input type="checkbox"/> Glass
<input type="checkbox"/> Ferrous metals	<input type="checkbox"/> Other metals	<input type="checkbox"/> Rigips

Total coating thickness	2 - 3 mm
Accessibility	15 hours after last work cycle
Working time	9 hours (for 100sqm)
No. of applications	3
Quarz Hardness	7
Solvent-free	yes
Permeable	no
Water-permeable	no
Emission-free	yes

Tools



Mixing bucket



Mixing tool



Sealing roller



Squeegee

Processing information

When processing reactive plastics, the temperature of the substrate as well as the ambient temperature are of particular importance. At low temperatures, chemical reactions are generally delayed, which leads to an extended processing, reworkability, walkability and hardening time. At the same time, the material consumption increases due to the higher viscosity. At high temperatures, the chemical reactions are accelerated, which means that the above mentioned times can be shorter. For a complete hardening of the reaction plastic, the average temperature of the substrate must be above the minimum temperature.

More detailed processing instructions can be found in the system data sheets and the technical data sheets of the individual components! These are delivered with your goods.